


## SOLVE YOUR FLOW, NOISE AND CAVITATION PROBLEMS AT THE SOURCE

THE D-BALL ADDRESSES NOISE AT THE SOURCE, REDUCING ADDED COSTS OF NOISE REDUCTION AND ALLOWING THE USE OF LESS COSTLY CONTROL COMPONENTS. AVAILABLE WITH INLET, OUTLET OR VARIABLE IMPEDANCE TRIMS.

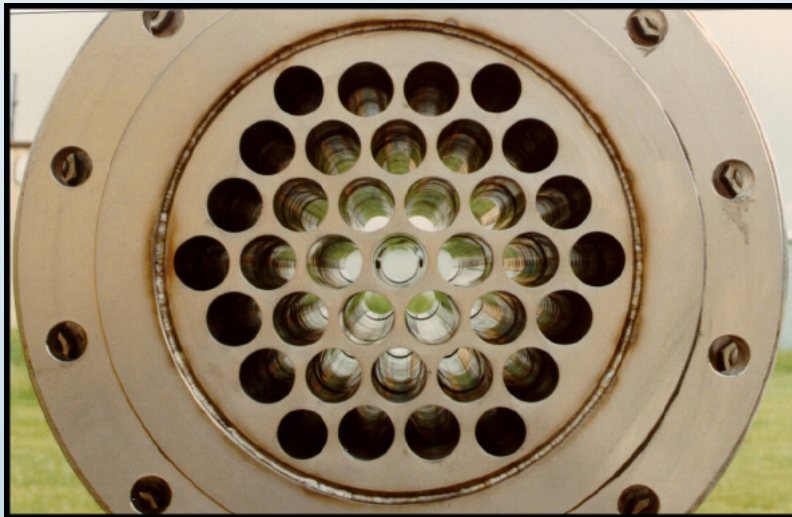

Trim Sizing Data * Cv											
SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"	20"	24"
MAX	47	160	250	540	880	1510	2140	3160	4180	6600	9230

### Case History in Steam Letdown Service

Valve Size: 3" - ANSI 600

P1 750 psig (51.6 barg)

T1 750 F

P2 35 psig (2.4 barg)

Flow Rate: 2,200 to 44,000 lbs per hour. (Avg 20,000)

Installed 1991 (June)

Over 2.5 + billion lbs of steam!

Still working - reference available on request!!

Previously installed cage guided stellite trim failed in 9 months!!!